


Apply to

Application: multiripping and ripping, reboring and grooving not available.









Machine: multiripping machine, moulder and cleaving machine.

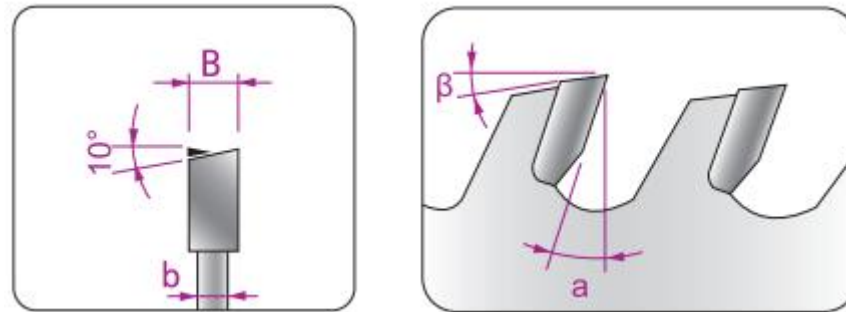Material: softwood and hardwood at max. 10% humidity rate.

Technical Parameters



| Outer diameter D (mm) | Tooth Width B (mm) | Body Thickness b (mm) | Bore d (mm) | Cutting angle a | Back angle β | T-type | Positioning hole | Number of teeth z |
|--------------------------|-----------------------|--------------------------|----------------|--------------------|-----------------------|--------|---------------------|-------------------------|
|--------------------------|-----------------------|--------------------------|----------------|--------------------|-----------------------|--------|---------------------|-------------------------|

|  |  |  |  |  |  |  |  | |
|---|---|---|--|---|---|---|---|------|
| D (mm) | B (mm) | b (mm) | d (mm) | α | β | T-type | positioning hole N° /A/L | Z |
| 180 | 1.1 | 0.8 | 60 | 20 | 15 | ATB | 3/9/75 | 24 |
| 180 | 1.1 | 0.8 | 65 | 20 | 15 | ATB | 3/9/80 | 24 |
| 220 | 1.4 | 1.0 | 60 | 20 | 15 | ATB | 3/9/75 | 32 |
| 220 | 1.4 | 1.0 | 65 | 20 | 15 | ATB | 3/9/80 | 32 |
| 250 | 1.7 | 1.2 | 60 | 20 | 15 | ATB | 3/9/75 | 32 |
| 255 | 1.8 | 1.3 | 70 | 20 | 15 | ATB | 2CH 21*5 | 40+3 |
| 250 | 2.2 | 1.6 | 50/60/70 | 20 | 15 | ATB | 2CH 21*5 | 30 |

| | | | | | | | | |
|-----|-----|-----|----|----|----|------|----------|----|
| 255 | 1.7 | 1.2 | 70 | 20 | 15 | FLAT | 2CH 21*5 | 24 |
| 280 | 2.2 | 1.6 | 60 | 20 | 15 | ATB | 3/10/75 | 36 |
| 300 | 2.2 | 1.6 | 50 | 20 | 15 | ATB | | 36 |
| 300 | 2.2 | 1.6 | 70 | 20 | 15 | ATB | 2CH 21*5 | 36 |
| 350 | 2.5 | 1.8 | 50 | 20 | 15 | ATB | | 40 |

Remarks:Other specifications can be customized as requested. OEM and ODM services provided