

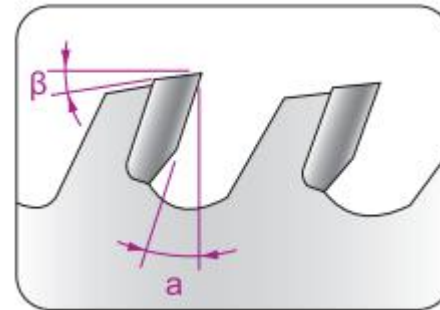

## Apply to








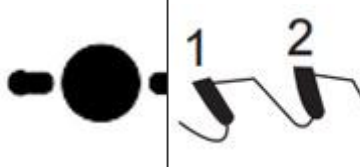
**Application:** multiripping

**Machine:** multiripping machine

**Material:** softwood and hardwood at max. 15% humidity rate.

## Technical Parameters



Outer diameter D (mm)	Tooth Width B (mm)	Body Thickness b (mm)	Bore d (mm)	Cutting angle $\alpha$	Back angle $\beta$	T-type	Positioning hole	Number of teeth z
								
D (mm)	B-B1 (mm)	b (mm)	d (mm)	$\alpha$	$\beta$	T-type	positioning hole N° /A/L	Z
105	2.2-1.3	1.5	40	20	15	ATB		20
105	3.0-2.4	2.0	40	20	15	ATB		20
130	2.2-1.2	1.5	40	20	15	ATB		20
130	3.0-2.4	2.2	40	20	15	ATB		20
150	2.2-1.4	1.5	40	20	15	ATB		24
150	3.0-2.4	2.2	40	20	15	ATB		24

160	2.2-1.4	1.5	40	20	15	ATB		24
160	3.0-2.4	2.2	40	20	15	ATB		24
180	2.2-1.8	1.6	40	20	15	ATB		36
180	3.0-2.4	2.2	40	20	15	ATB		36
212	2.4-1.3	1.4	50	20	15	ATB		36
212	3.2-2.5	2.5	40	20	15	ATB		36
230	2.4-1.6	1.6	40	20	15	ATB		36
230	3.2-2.6	1.6	40	20	15	ATB		36
255	2.6-2.0	1.9	40	20	15	ATB		36
255	3.2-2.8	2.5	40	20	15	ATB		36
280	2.8-2.2	2.1	50	20	15	ATB		36
280	3.2-3.0	2.5	50	20	15	ATB		36

305	2.8-2.2	2.2	50	20	15	ATB		36
305	3.2-3.0	2.5	50	20	15	ATB		36
320	2.8-2.6	2.2	50	20	15	ATB		36
320	3.4-3.0	2.7	50	20	15	ATB		36
355	3.4-2.8	2.5	50	20	15	ATB		36
355	4.0-3.6	2.8	50	20	15	ATB		36
380	3.6-3.0	2.6	60	20	15	ATB		36
380	4.4-3.8	3.0	60	20	15	ATB		36
405	3.6-3.0	2.7	60	20	15	ATB		40
405	4.4-3.8	3.2	60	20	15	ATB		40
455	4.0-3.4	2.8	60	20	15	ATB		40+6
455	4.8-3.9	3.2	60	20	15	ATB		40+6

480	4.0-3.4	2.8	60	20	15	ATB		42+6
480	4.6-4.2	3.2	60	20	15	ATB		42+6
500	4.2-3.6	3.0	70	20	15	ATB		42+6
500	5.0-4.4	3.4	70	20	15	ATB		42+6
550	4.4-3.8	3.6	70	20	15	ATB		44+8
550	5.2-4.5	4.4	70	20	15	ATB		44+8
600	5.5-4.2	3.8	70	20	15	ATB		48+8
600	6.0-5.6	4.2	70	20	15	ATB		48+8
650	6.0-4.8	3.8	70	20	15	ATB		48+8
700	6.0-5.0	4.5	30	20	15	ATB		52+8

Divided into domestic steel plate and imported steel plate

Remarks:Other specifications can be customized as requested. OEM and ODM services provided

