


## Application









**Features:** It is suitable for different profiles and heat sinks slotting and grooving. It can be used for single-chip or multi-chip combination and has the advantages of small shock, smooth sawing and accurate chamfer size.

**Machine:** cutting machine for aluminum alloy slotting.

**Material:** aluminum slotting.
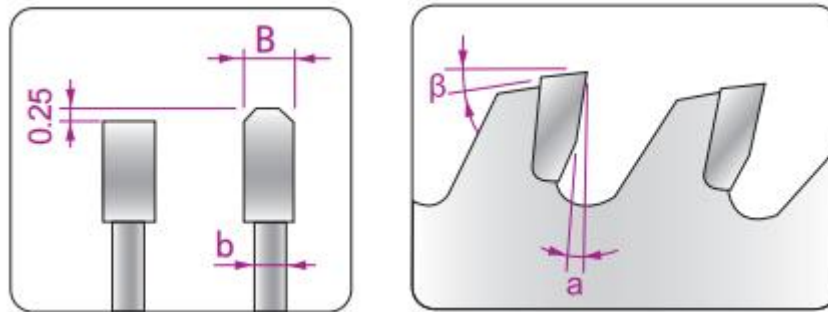
## Technical Parameters



| Outer diameter<br>D (mm)  | Tooth width<br>B (mm)   | Body Thickness<br>b (mm)  | Bore<br>d (mm)   | Cutting angle<br>$\alpha$   | Back angle<br>$\beta$   | T-type  | Number of teeth<br>z  |
|---|---|---|--|---|---|---|---|
|  |  |  |  |  |  |  |  |
| D (mm)  | B (mm)  | b (mm)  | d (mm)   | $\alpha$  | $\beta$   | T-type  | Z   |
| 150   | 4.0   | 3.0   | 22/25.4  | 5   | 12  | Flat tooth  | 20  |
| 150   | 6.0   | 5.0   | 22/25.4  | 5   | 12  | Flat tooth  | 20  |
| 150   | 8.0   | 7.0   | 22/25.4  | 5   | 12  | Flat tooth  | 20  |
| 150   | 10  | 9.0   | 22/25.4  | 5   | 12  | Flat tooth  | 20  |
| 200   | 4.0   | 3.0   | 22/25.4  | 5   | 12  | Flat tooth  | 24  |
| 200   | 6.0   | 5.0   | 22/25.4  | 5   | 12  | Flat tooth  | 24  |

|     |     |     |         |   |    |            |    |
|-----|-----|-----|---------|---|----|------------|----|
| 200 | 8.0 | 7.0 | 22/25.4 | 5 | 12 | Flat tooth | 24 |
| 200 | 10  | 9.0 | 22/25.4 | 5 | 12 | Flat tooth | 24 |
| 250 | 4.0 | 3.0 | 25.4/30 | 5 | 12 | Flat tooth | 40 |
| 250 | 5.0 | 4.0 | 25.4/30 | 5 | 12 | Flat tooth | 40 |
| 250 | 6.5 | 5.5 | 25.4/30 | 5 | 12 | Flat tooth | 40 |
| 250 | 8.0 | 7.0 | 25.4/30 | 5 | 12 | Flat tooth | 40 |
| 250 | 10  | 9.0 | 25.4/30 | 5 | 12 | Flat tooth | 40 |
| 305 | 4.0 | 3.0 | 25.4/30 | 5 | 12 | TCG        | 40 |

Remarks:Other specifications can be customized as requested. OEM and ODM services provided