

Application

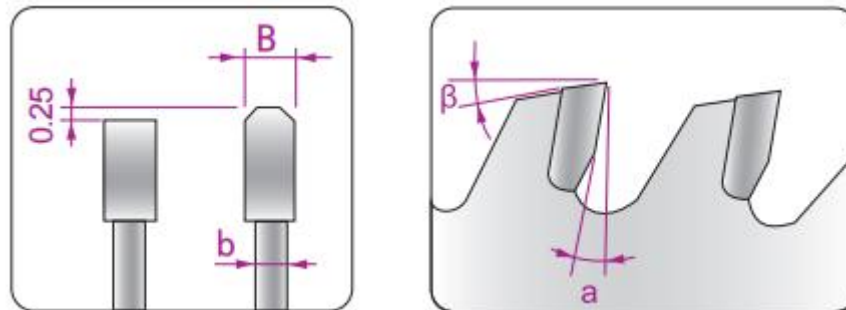
Features: It is mainly used when the material is not cooled. It has the advantages of high impact resistance, high durability, no burrs and no easy deformation for materials to be cut.









Machine: CNC machine, double head cutting saw

Material: extruded aluminum

Remarks: customizable PCD tip

Technical Parameters



Outer Diameter D (mm)	Tooth Width B (mm)	Body Thickness b (mm)	Bore d (mm)	Cutting Angle α	Back Angle β	T-type	Number of Teeth z
							
D (mm)	B (mm)	b (mm)	d (mm)	α	β	T-type	Z
305	3.0	2.4	25.4/30	10	13	TCG	60
							80
							100
							120
355	3.2	2.6	25.4/30	10	13	TCG	60
							80
							100

							120
405	3.5	2.8	25.4/30	10	13	TCG	60
							80
							100
							120
455	4	3.2	25.4/30	10	13	TCG	60
							80
							100
							120
500	4.5	3.8	25.4/30	10	13	TCG	60
							80
							100

							120
550	4.8	4.0	30/38	10	13	TCG	60
							72
							80
							100
							120
							144
600	5.0	4.0	30/38	10	13	TCG	60
							72
							80
							100
							120

Remarks: Other specifications can be customized as requested. OEM and ODM services provided