


Apply to

Application: Ripping and multiripping









Machine: squaring saw, multiripping saw

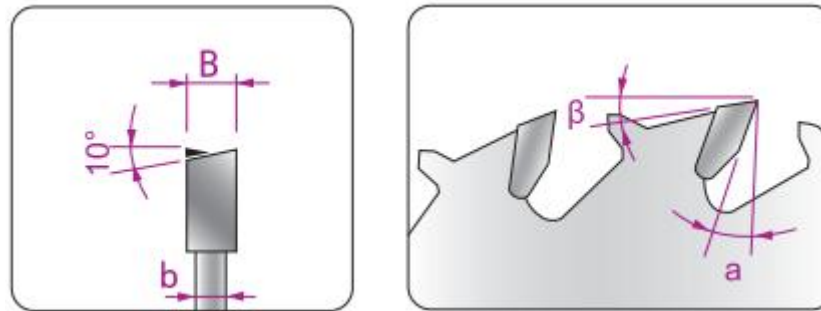Material: softwood and hardwood

Technical Parameters



Outer diameter D (mm)	Tooth Width B (mm)	Body Thickness b (mm)	Bore d (mm)	Cutting angle a	Back angle β	T-type	Positioning hole	Number of teeth z
--------------------------	-----------------------	--------------------------	----------------	--------------------	-----------------	--------	---------------------	-------------------------

								
D (mm)	B (mm)	b (mm)	d (mm)	α	β	T-type	positioning hole N° /A/L	Z
230	3.2	2.2	25.4	15	15	ATB		40
230	3.2	2.2	30	15	15	ATB	FT01+FT03	40
250	3.2	2.2	25.4	15	15	ATB		40
								60
250	3.2	2.2	30	15	15	ATB	FT01+FT03	40
								60

300	3.2	2.2	25.4	15	15	ATB		48
								60
300	3.2	2.2	30	15	15	ATB	FT01+FT03	48
								60
350	3.5	2.5	25.4	15	15	ATB		54
								60
350	3.5	2.5	30	15	15	ATB	FT01+FT03	54
								60
400	3.5	2.5	25.4	15	15	ATB		60
400	3.5	2.5	30	15	15	ATB	FT01+FT03	60
300	3.2	2.2	25.4	20	15	ATB		28
								36

300	3.2	2.2	30	20	15	ATB	FT01+FT03	28
								36
350	3.5	2.5	25.4	20	15	ATB		32
350	3.5	2.5	30	20	15	ATB	FT01+FT03	32
450	4.4	3.0	30	20	15	ATB	2/10/60	38
500	4.4	3.2	30	20	15	ATB	2/10/60	42
550	4.4	3.5	30	20	15	ATB	2/10/60	48
Remarks:Other specifications can be customized as requested. OEM and ODM services provided								